

FLEX

Nasevat 2025




Oil Pattern Distance	40	Reverse Brush Drop	34	Oil Per Board	50 ul
Forward Oil Total	15.6 mL	Reverse Oil Total	7.85 mL	Volume Oil Total	23.45 mL
Tank Configuration	N/A	Tank A Conditioner		Tank B Conditioner	

START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	3	14	A	111	0.0	3.9	3.9 5550
2	9L	9R	1	18	A	23	3.9	6.4	2.5 1150
3	10L	10R	3	18	A	63	6.4	14.0	7.6 3150
4	11L	11R	3	18	A	57	14.0	21.6	7.6 2850
5	13L	13R	3	18	A	45	21.6	29.2	7.6 2250
6	14L	14R	1	22	A	13	29.2	32.3	3.1 650
7	2L	2R	0	22	A	0	32.3	34.0	1.7 0
8	2L	2R	0	26	A	0	34.0	40.0	6.0 0

START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	22	A	0	40.0	32.0	-8.0 0
2	14L	14R	1	22	A	13	32.0	28.9	-3.1 650
3	13L	13R	3	18	A	45	28.9	21.3	-7.6 2250
4	11L	11R	3	18	A	57	21.3	13.7	-7.6 2850
5	10L	10R	2	14	A	42	13.7	9.8	-3.9 2100
6	2L	2R	0	10	A	0	9.8	0.0	-9.8 0

Cleaner Ratio Main Mix 5:1 Forward
 Cleaner Ratio Back End Mix 5:1 Reverse
 Cleaner Ratio Back End Distance 59 Combined
 Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50
 This Pattern Up Loaded From Slot # 6 In Lane
 Machine On 9/10/2013 11:36 AM

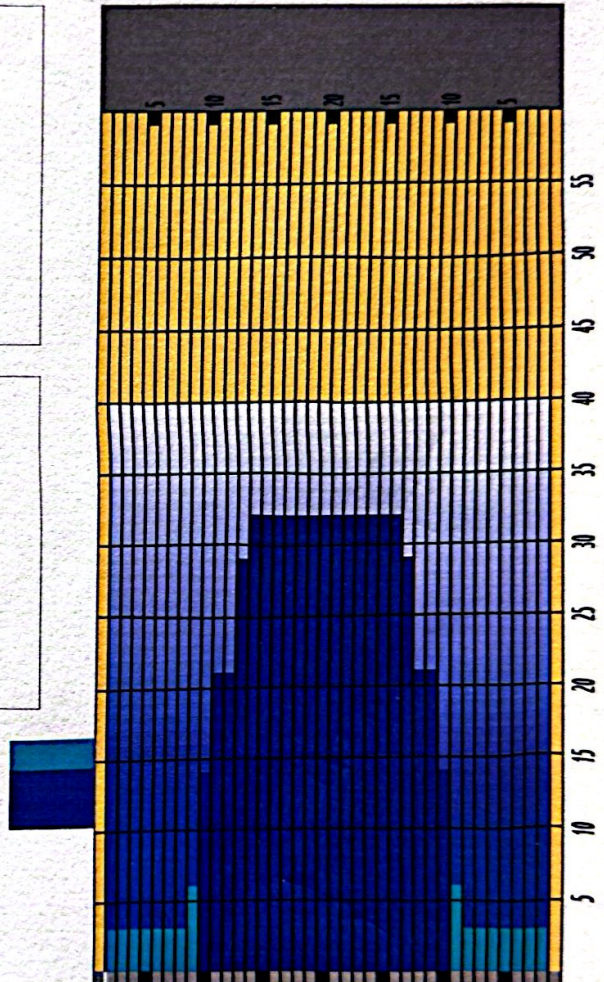

Item	3L-7L 18L-18R	8L-12L 18L-18R	13L-17L 18L-18R	18L-18R 17R-13R	18L-18R 12R-3R	18L-18R 7R-3R
Description	Outside Track/Middle	Middle Track/Middle	Inside Track/Middle	Middle: Inside Track	Middle: Middle Track	Middle: Outside Track
Track Zone Ratio	7.67	2.5	1.02	1.02	2.5	7.67

